




DURA-GLOSS

Multi-Speed Buffable Floor Coating

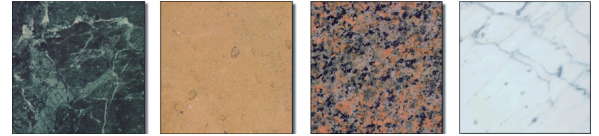

DESCRIPTION

DURA-GLOSS utilizes an advanced polymer system to provide a brilliant gloss and protective coating on most natural polished stone surfaces. DURA-GLOSS improves slip resistance on highly polished stone surfaces. This water-based high solids formula will produce a high initial gloss that can be maintained with any type of floor equipment, from conventional to UHS. DURA-GLOSS levels easily and dries rapidly.

DIRECTIONS FOR USE

Floor Preparation:

Using ENFORCER HEAVY DUTY Stripper, strip floor of old finish and wax, paying particular attention to under furniture, and built-up areas. Remove all stripping solutions from floor with mop or wet dry vacuum. If necessary, rinse thoroughly with clean water and allow to completely dry. Using a clean mop or applicator apply a thin uniform coat of DURA-GLOSS. Allow to dry for a minimum of 20 minutes after each coat. Do not apply more than 3 coats in a 24 hour period. Floor should be thoroughly dry before traffic is allowed in area.

For Multi Speed Buffing:

This is an ideal product for use with polishing machines of

175 rpm or higher. CAUTION: Some soft marble or limestone floors may not be appropriate for high speed burnishing. Test this procedure in an inconspicuous area prior to buffing entire floor. Prior to buffing, the floor surface should be dust mopped. For spray buffing and for mop-on restoring use REBOUND; for restoring with an automatic scrubber, use REBOUND.

Maintenance:

Maintain by dust mopping daily. Damp mop or clean with an automatic scrubber as required, using BRITE LITES Floor Coating Neutral Cleaner, at the specified dilution. Spray buffing to remove embedded soils is recommended using REBOUND. Worn areas, or the entire floor, may be re-coated as required to maintain a uniform high gloss.

SPECIFICATIONS

Product type	Aqueous coating
Appearance	Opaque
Odor	Acrylic-like
Specific Gravity (g/cc)	1.02 ± 0.01
pH	9.0 ± 0.5
Total Solids (%).....	26.5 ± 0.5
Non-Volatile Solids (%).....	22.0 ± 0.5

Ease of application	Superior
Flash Point	None
Multi-Speed Buffable	Yes
Gloss Level	Outstanding
Durability	Excellent
Drying Time (minutes)	20 - 30
Coverage (sq. ft./gal).....	2500
UL Classified	Yes

SAFETY INFORMATION

KEEP OUT OF THE REACH OF CHILDREN.

Precautionary statement

Prevention: Observe good industrial hygiene practices.

Response: Wash thoroughly after handling.

Storage: Store away from incompatible materials.

Disposal: Dispose of contents/container in accordance with local/regional/national/international regulations.

This product is not known to be a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.

Additional safety measures:

Read the entire label and SDS before using this product, and for additional first-aid measures. SDS for this product is available on the web at www.nclonline.com

KEEP FROM FREEZING

For Commercial and Industrial Use Only

Warranty: Determining the suitability of this product for its intended purpose shall solely be the responsibility of the user. In the event of failure, the sole obligation of National Chemical Laboratories shall be to replace the product deemed defective. User assumes all risk and liability; neither manufacturer nor seller will be held liable for any injury or damage.



401 N. 10th Street • Philadelphia, PA 19123
1-800-NAT-CHEM • 215-922-1200 • FAX: 215-922-5517
www.nclonline.com • e-mail:info@nclonline.com